



Ilargi Doble Lamp

Iratzoki-Lizaso

Pendant Ilargi Doble Lamp LED 40.6 LED warm-white 2700K PHASE CUT Madera Oscura 1833lm

Technical features

Luminaire total power: 40.6W
Real lumens: 1833
Real lm/W: 45
Correlated Colour Temperature (CCT): LED warm-white 2700K
UGR: <=16
Structure material: Wood, Steel
Structure finish: Madera Oscura
Diffuser material: Glass
Diffuser finish: Opal
Driver Brand: HEP
Voltage / frequency: 220-240V/50-60Hz
Dimming protocol: PHASE CUT
Power Factor: 0.90
THD%: 20
Useful life: 50,000h L80B20
Warranty: 5 años
Easily recyclable luminaire



Luminotechnic features

Luminance C0°G65°: 738
Luminance C90°G65°: 738
CRI: 90
MacAdam steps: 3
Photobiological risk: RG2

UGR		Lampholder	Quantity	Light source power (W)	Correlated Colour Temperature (CCT)
S=0.250					
Ceiling / cavity	0.7	LED	1	36.1W	LED warm-white 2700K
Walls	0.5				
Working Plane	0.2				
Room dimensions	X=4H, Y=8H				
UGR crosswise	14.6				
UGR lengthwise	14.6				

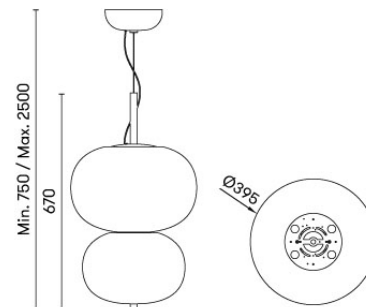


Image may not match reference. LedsC4 reserves the right to amend any of the product's components. The data related to flux, power and colour temperature may be subject to changes made by the manufacturer.



Ilargi Doble Lamp

Iratzoki-Lizaso

Pendant Ilargi Doble Lamp LED 40.6 LED warm-white 2700K PHASE CUT Madera Oscura 1833lm

Light application



Image may not match reference. LedsC4 reserves the right to amend any of the product's components. The data related to flux, power and colour temperature may be subject to changes made by the manufacturer.