



Scarlett Circular Surface Individual ø930mm

Nahtrang Studio

Pendant Scarlett Circular Surface Individual ø930mm LED 55.1 2700K ON-OFF Black 4111lm

Technical features

Luminaire total power: 55.1W

Real lumens: 4111

Real lm/W: 75

Correlated Colour Temperature (CCT): 2700K

Lens / reflector angle: HORIZONTAL 115°

Structure finish: Black

Diffuser material: Polycarbonate

Diffuser finish: OPAL

Voltage / frequency: 220-240V/50-60Hz

Dimming protocol: ON-OFF

Power Factor: 0.98

Useful life: 50,000h L80B20

Warranty: 5 años



Luminotechnic features

CRI: 90

MacAdam steps: 3

Photobiological risk: RG1

UGR		Lampholder	Quantity	Light source power (W)
S=0.250				
Ceiling / cavity	0.7	LED	1	50.8W
Walls	0.5			
Working Plane	0.2			
Room dimensions	X=4H, Y=8H			
UGR crosswise	24.3			
UGR lengthwise	24.3			


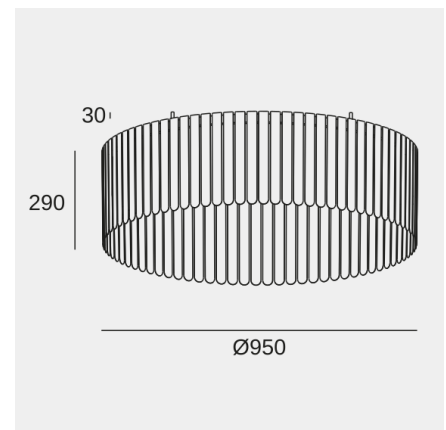


Image may not match reference. LedsC4 reserves the right to amend any of the product's components. The data related to flux, power and colour temperature may be subject to changes made by the manufacturer.



Scarlett Circular Surface Individual ø930mm

Nahtrang Studio

Pendant Scarlett Circular Surface Individual ø930mm LED 55.1 2700K ON-OFF Black 4111lm

Logistics



x 1

Packaging: 1010mm x 1010mm x
195mm

Image may not match reference. LedsC4 reserves the right to amend any of the product's components. The data related to flux, power and colour temperature may be subject to changes made by the manufacturer.