



Max Medium Square

LedsC4 Team

Downlight IP66 Max Medium Square LED 6.5 LED warm-white 3000K Urban grey 423lm

Technical features

Luminaire total power: 6.5W

Real lumens: 423

Real lm/W: 65

Correlated Colour Temperature (CCT): LED warm-white 3000K

Lens / reflector angle: FLOOD 50°

UGR: <=19

Structure material: Aluminium

Structure finish: Urban grey

Diffuser material: Glass

Diffuser finish: Transparent

Equipment necessary but not included

Voltage / frequency: 18V/max.350mA

Useful life: 50,000h L80B20

Warranty: 5 years

Resistant to marine environments: Yes

Easily recyclable luminaire



Luminotechnic features

Luminance C0°G65°: 2976

Luminance C90°G65°: 2976

CRI: 90

MacAdam steps: 2

Photobiological risk: RG1

UGR	
S=0.250	
Ceiling / cavity	0.7
Walls	0.5
Working Plane	0.2
Room dimensions	X=4H, Y=8H
UGR crosswise	16.2
UGR lengthwise	16.2

Lampholder	Quantity	Light source power (W)	Correlated Colour Temperature (CCT)
LED	1	6.5W	LED warm-white 3000K




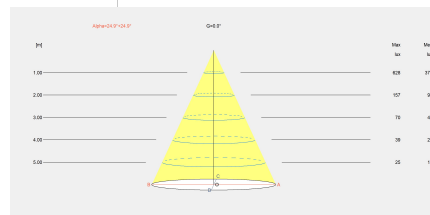


Image may not match reference. LedsC4 reserves the right to amend any of the product's components. The data related to flux, power and colour temperature may be subject to changes made by the manufacturer.

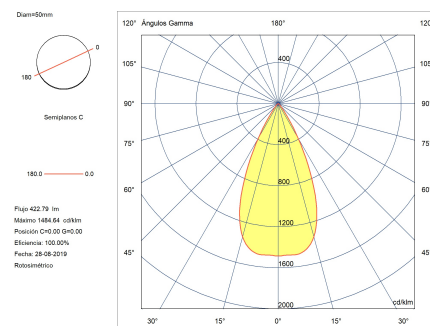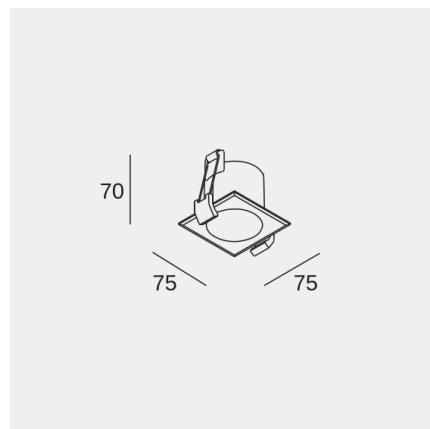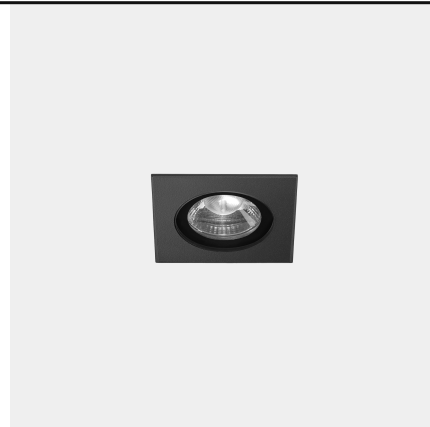


Max Medium Square

LedsC4 Team

Downlight IP66 Max Medium Square LED 6.5 LED warm-white 3000K Urban grey 423lm

Logistics



x 20

Net weight (kg): 0.39

Packaged weight (kg): 0.51

Packaging: 145mm x 105mm x 105mm

Image may not match reference. LedsC4 reserves the right to amend any of the product's components. The data related to flux, power and colour temperature may be subject to changes made by the manufacturer.




Max Medium Square

LedsC4 Team

Downlight IP66 Max Medium Square LED 6.5 LED warm-white 3000K Urban grey 423lm


Optional accessories



71-E133-00-00

5 filters for producing diffused light


Structure material: Polycarbonate
Dimensions: 40 x NA x 2
Net weight (kg): 0.02



71-E141-00-00

5 filters for producing light in an elliptical shape


Structure material: Polycarbonate
Dimensions: 40 x NA x 2
Net weight (kg): 0.01



71-E135-00-00

5 filters for producing light in a square shape

Structure material: Polycarbonate
Dimensions: 40 x NA x 1.5
Net weight (kg): 0.02



71-E131-00-00

5 honeycomb panels

Structure material: Aluminium
Dimensions: 40 x NA x 3
Net weight (kg): 0.01



71-9199-05-05

IP68 connector with six inlets

Structure material:
Dimensions: NA x NA x NA
Net weight (kg): 0.26

Image may not match reference. LedsC4 reserves the right to amend any of the product's components. The data related to flux, power and colour temperature may be subject to changes made by the manufacturer.

Optional accessories



71-E112-00-00

IP68 anti-condensation connector with two inlets

Structure material: Technopolymer
Dimensions: 23 x 88 x NA
Net weight (kg): 0.04



71-E467-00-00

Recess case

Structure material: Technopolymer
Dimensions: NA x NA x NA
Net weight (kg): 1



71-E463-00-00

Structure material: Methacrylate
Dimensions: 40 x NA x 3
Net weight (kg): 0.02



71-E510-00-00

Basic Connector Mini IP67 2 inputs 3 poles Ø5.5-7.5mm

Structure material: Nylon
Dimensions: 19 x 55 x NA
Net weight (kg): 0.02



71-E512-00-00

Basic Medium Connector IP68 2 inputs 4 poles Ø5.5-11.5mm

Structure material: Nylon
Dimensions: 24 x 71 x NA
Net weight (kg): 0.03

Image may not match reference. LedsC4 reserves the right to amend any of the product's components. The data related to flux, power and colour temperature may be subject to changes made by the manufacturer.